


09/23/99

Please type a plus sign (+) inside this box → 

PTO/SB/05 (4/98)
 Approved for use through 09/30/2000. OMB 0651-0082
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. Levy 2R
 First Inventor or Application Identifier Kenneth L. Levy
 Title Method And Apparatus For Robust Usage Of Embedded Data
 Express Mail Label No. EM441817611US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
 (Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 34]
 (preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages]
 a. ☐ Newly executed (original or copy)
 b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
 (for continuation/divisional with Box 16 completed)
 i. ☐ DELETION OF INVENTOR(S)
 Signed statement attached deleting
 inventor(s) named in the prior application,
 see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
 FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
 IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
 (if applicable, all necessary)
 a. ☐ Computer Readable Copy
 b. ☐ Paper Copy (identical to computer copy)
 c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
 (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
 (Should be specifically itemized)
13. ☒ * Small Entity Statement(s) ☒ Statement filed in prior application,
 (PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
 (if foreign priority is claimed)
15. ☒ Other: Assignment Application

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

* Prior application information: Examiner Group / Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	<u>Kenneth L. Levy</u> <u>AIPL</u>				
Address	<u>110 NE Cedar Street</u>				
City	<u>Stevenson</u>	State	<u>WA</u>	Zip Code	<u>98648</u>
Country	<u>USA</u>	Telephone	<u>509-427-5374</u>	Fax	<u>509-427-7101</u>

Name (Print/Type)	<u>Kenneth L. Levy</u>	Registration No. (Attorney/Agent)	<u> </u>
Signature	<u>[Signature]</u>	Date	<u>9/22/99</u>

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Docket #

Certificate of Mailing by "Express Mail" (37 CFR 1.10)

Applicant: Kenneth L. Levy

Serial Number: To be assigned

Filing Date: To be assigned

Examiner: To be assigned

Title: METHOD AND APPARATUS FOR ROBUST EMBEDDED DATA



I hereby verify that this provisional patent application and fee is being deposited with the

U.S. Postal Service via "Express Mail Post Office to Addressee, under 37 CFR 1.10, on

Sept. 23, 1999, and is addressed to the Assistant Commissioner for Patent,
Washington, D.C. 20231.

Amy M. Weissfeld

(Typed or Printed Name of Person Mailing Correspondence)


(Signature of Person Mailing Correspondence)

(Signature of Person Mailing Correspondence)

EM441817611 US

(“Express Mail” mailing Label Number)

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)

Lery 2R

Applicant, Patentee, or Identifier: *Kenneth L Lery*

Application or Patent No.: _____

Filed or Issued: _____

Title: *Method and Apparatus for Robust Embedded Data*

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.
☒ Each such person, concern, or organization is listed below.

*Acoustic Information Processing Lab, LLC
110 NE Cedar Street
Stevenson, WA 98648*

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Kenneth L. Lery
NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

[Signature]
Signature of inventor

Signature of inventor

Signature of inventor

9/23/99
Date

Date

Date

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket Number (Optional)

Levy 2 R

Applicant, Patentee, or Identifier: Kenneth L. Levy

Application or Patent No.: _____

Filed or Issued: _____

Title: Method And Apparatus For Robust Usage Of Embedded Data

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Acoustic Information Processing Lab, LLC

ADDRESS OF SMALL BUSINESS CONCERN 110 NE Cedar Street, Stevenson,
WA, 98648

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Kenneth L. Levy

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING AIPL, 110 NE Cedar St, Stevenson, WA 98648

SIGNATURE [Signature] DATE 9/23/99

METHOD AND APPARATUS FOR ROBUST EMBEDDED DATA

This application claims the benefit of Provisional Patent Applications Ser. #60/101,851 filed 9/25/98,
5 #60/110,683 filed 12/02/98, #60/114,725 filed 12/31/98, and #60/126,591 filed 3/26/99, incorporated herein by reference.

This application relates to Provisional Patent Applications Ser. #60/123,587 filed 3/10/99 and
10 #60/126,592 filed 3/26/99, incorporated herein by reference. The application also relates to Utility Patent Application Ser. #_____ filed on 9/23/99 (the same date as this application) entitled "Method and apparatus for embedding auxiliary information
15 within original data" by the same author as this application, Kenneth L. Levy, incorporated herein by reference.

Field of the Invention

20 This invention relates to the field of signal processing, and more specifically, to techniques for hiding auxiliary information within original data.

Background of the Invention

25 There are many techniques for embedding auxiliary information within original data, also known as watermarking or steganography. The original data consists of perceivable media, such as audio, video, stills, etc. It is usually desirable for the embedded
30 data to be non-perceivable, but some content degradation may be okay for some configurations. Several good algorithms have increased the embedded data's ability to resist tampering and removal. One current use of embedded data in media is to include
35 copy management information within the embedded data.

Unfortunately, with copy management schemes presented in the prior art, if embedded copy management information is removed the original data is susceptible to illegal distribution.

5 Embedded data techniques are susceptible to removal of auxiliary information for either of the following reasons. First, the very nature of embedded data is incompatible with bit-rate reducing (a.k.a. compression) schemes, which remove the non-perceivable
10 aspects of the data such as done with MPEG compression. Since a key feature of any embedded data is the fact that it is non-perceivable, compression schemes will act to remove the embedded data. Even if the embedded data is designed to survive the current compression
15 technology, the next generation technology will probably remove it. Bit-rate compression schemes are very important in the digital distribution of media, and receiving much research. Second, noise reduction techniques will be able to remove embedded data. Noise
20 reduction techniques are a hot topic, and used to restore old recordings. Since most non-perceivable embedded data is similar to noise, it will be removed by these noise reduction techniques. Again, even if the embedded data is designed to survive the current
25 restoration technology, the next generation technology will probably remove it.

Summary of the Invention

It is an object of this invention to increase the
30 robustness of embedded data to attack. Attack is defined as getting around what the embedded data is supposed to provide or prevent. Attack may include duplication, which is defined as being able to replicate or impersonate the embedded data from one
35 data segment to another. Attack may also include

modification, which is defined as changing the embedded data for a desired affect, such as from "no copying" to "copying allowed".

This invention includes two preferred embodiments
5 describing novel ways of using embedded data such that
the embedded data is more robust to attack, labeled the
enabling and registration process. In addition,
multiple preferred embodiments improving the robustness
of embedded data to duplication or modification are
10 disclosed, labeled dynamic locking and unlocking.

The first preferred usage embodiment is the enabling process, which involves using embedded data to enable an action, such as copying, playing or otherwise rendering. Thus, if the embedded data is removed by
15 attack, the end-user has gained nothing because the original data has become unusable. Improvements in this process occur when the embedded data is robust against duplication and modification.

The second preferred usage embodiment is the registration process, where the recording device embeds its registration in the data. In this embodiment, the recording device can refer to a physical device, such as a CD or DVD burner, or virtual device, such as an MP3 or AAC encoder. This registration process allows any illegal media to be traced back to the original owner assuming that recording devices are registered when purchased. At the very least, the illegal media could be traced back to the specific recording device's place of purchase, providing law enforcement with a good starting point.

The dynamic locking and unlocking preferred embodiments improve the robustness of existing or future embedded data techniques to duplication and/or modification. Dynamic locking causes the embedded data
35 to be dependent upon the media by including one or both

of the following steps. The first step includes modifying the auxiliary information by the media. The second step includes encrypting the auxiliary information, possibly modified in the first step. The encryption technique could be RSA, DES or any appropriate algorithm. After dynamically locking the auxiliary information, it is embedded in the original data. Each step of dynamic locking provides its own independent advantages. However, incorporating both steps produces auxiliary information that cannot be transferred between media, modified, or created.

The dynamic unlocking process performs the inverse steps, assuming each specific step was performed in the dynamic locking process. The first step involves decrypting the retrieved data. The second step involves unmodifying the output of the first step or the retrieved data directly, depending upon whether the first step was performed, and thus producing the original auxiliary data.

Five example utilizations of the enabling and dynamic locking process and apparatus are described briefly here and in detail below to aid in the understanding of both processes and apparatus. These utilizations include (1) distribution of compressed media such that it can only be played by the requester's playback device, (2) using the presence of the embedded data to specify copy-once access, (3) protection of DVD media, (4) photo-card validation, and (5) sending secure secret messages.

In the first example utilization, a media player, such as a computer with MP3 software player, contacts an Internet site to download media, such as a song in MP3 format. The player sends its unique identifier to the Internet site, where the identifier is modified using the original data and the result is encrypted.

downloaded to the player. The media player is able to extract the identifier from the combined data, and

```
10 not play the combined data.
```

15 determine the identifier, even if he were able to
extract the auxiliary data from the combined data. In
addition, if the process did not include modifying the
auxiliary information with the original information,
the embedded data could be copied between media.

20 Finally, the encryption key also requires proper
handling, and the identifier may include additional
information besides the player identifier.

25 such as "allow no copying", "allow copying one time,
but not copying of a copy", and "allow unlimited
copying". The recorder would retrieve the copy code
and not copy unless permitted by the code. The copy
would either contain no "allow copying one time..." code,
30 or contain an "allow no copying" code. For broadcasts,
both the player and the broadcast unit would know the
code beforehand (i.e. predefined) or the code would be
included in the broadcast.

In the third example utilization, two approaches
35 are described. In the first approach, a DVD player

will not play the DVD without retrieving the predefined identifier embedded in the original data. For extra security the identifier could be encrypted with a key located at a central database or in a section of the DVD not available for copy. In the second approach, the identifier could control the number of generation of copies allowed, noting that if no identifier exists, no copies can be made. Or, there could be two layered identifiers for both types of copy management.

The fourth example utilization involves embedding secure data in the picture of a photo-card, as in a photo used for identification purposes like a driver's license or credit card. If the retrieved information at the photo-card reader does not match that of the central database, the card is a fake and will not be authorized for use. Note that the information and key exchange must be securely transmitted.

The fifth example utilization allows the secure transmission of secret information, hidden in the media. Most bystanders will not know the secret message is attached. If found, the hidden information cannot be read by, modified by, and/or transferred to other media by an imposter when the embedded data is dependent upon the media and encrypted. Different types of encryption, symmetric or public/private key, can be used for creating the desired protection or authentication of the embedded data. This hidden information enables a person or machine on the receiving side to perform an action.

The apparatus for these processes involves a logic processor, possibly including DSP chips, host CPUs or custom analog or digital circuitry, and memory. The configuration and machine code for this invention are easily designed given this disclosure and familiarity with the state of the art in cryptology and electrical

engineering.

Brief Description of the Drawings

FIG. 1 shows the block diagram for the enabling
5 process.

FIG. 2 shows the block diagram for the
registration process.

FIG. 3 demonstrates the way in which dynamic
locking blocks the duplication of the auxiliary data.

10 FIG. 4 displays the input and output for an
exclusive-or (XOR) function.

FIG. 5A displays an overview of the process of
dynamic locking and embedding of the auxiliary data.

15 FIG. 5B displays an overview of the process of
retrieving and dynamic unlocking of the auxiliary data.

FIG. 6A shows the modification step of dynamic
locking for locally masked embedded data.

FIG. 6B shows the modification step of dynamic
locking for pulse width modified (PWM) embedded data.

20 FIG. 6C shows the modification step of dynamic
locking for inventions based upon PN sequences.
Auxiliary data is abbreviated as aux.

FIG. 7A displays the pseudocode in the form of a
flowchart for locking and embedding the auxiliary data
25 using header blocks.

FIG. 7B displays the pseudocode in the form of a
flowchart for retrieving and unlocking the auxiliary
data using header blocks.

FIG. 8 shows the basic process behind the example
30 utilizations. The dotted boxes are optional. The
dashed boxes group similar items. In addition,
although three key locations are shown, usually only
one key is used and its location depends upon the
utilization requirements. Finally, the abbreviation ID
35 is used and many times refers to an identifier, but can

65269-16240459

also refer to any auxiliary information.

FIG. 9 shows the apparatus for these robust data embedding techniques.

FIG. 10A shows an embodiment of the apparatus of
5 FIG. 9 for dynamic locking.

FIG. 10B is a block diagram showing an embodiment of the apparatus of FIG. 9 for dynamic unlocking.

Detailed Description

10 We begin with some definitions. Media or content includes, but is not limited to, audio, video, still images, combinations of the above, and forms related to other senses. The terms media and content are used interchangeably. Media does not refer to a storage
15 medium. A media or content segment includes, but is not limited to, a song, part of a song, movie, part of a movie, part or all of a sound track, part or all of a still image, a taste, a touch, and an odor. Original data is the raw, unprotected data. The auxiliary
20 information refers to any data that is to be embedded in the original data. The ID **140** in Fig. 8 refers to this auxiliary information, and may include but is not limited to, information such as the player ID, number of copies allowed, usage time or date limits, and
25 content enhancement information such as author, copyright, publisher, song lyrics or image details. The embedded data is the data that is actually embedded in the original data. The embedded data differs from the auxiliary data by the transformation used in the
30 embedding process. This transformation can include the modifying process and/or encryption involved in dynamic locking, and the embedding process such as bit manipulations, pulse-width modulation, or spreading with frequency transformation or pseudo-random noise
35 sequence. The combined data results from adding the

embedded data to the original data. Robustness to
 attack is defined as getting around what the embedded
 data is supposed to provide or prevent. Finally, a
 pirate is a person who tries to illegally obtain the
 5 data or use the protected device.

Enabling Process

Fig. 1 demonstrates the enabling process, which is
 the first preferred usage embodiment of the invention.
 10 This process requires using a logic processor **900** and
 memory **910**, as shown in Fig 9. First, as shown in box
10, processor **900** retrieves the auxiliary data from the
 combined data **5** and stores it in memory **910**. Then,
 processor **900** determines whether the embedded data
 15 allows the desired action, as shown in box **20**. If so,
 the desired action is allowed, as shown in box **30**. If
 not, the desired action is disallowed, as shown in box
40.

Registration Process

Fig. 2 demonstrates the registration process,
 which is the second preferred usage embodiment. This
 process involves assigning a unique registration code
305 to each recording device **300**, and embedding the
 25 registration code **305** into the media when it is
 recorded, as shown in box **310**. Then, when illegal
 media is found in an open-market **320**, it can be traced
 to the owner of the recording device via the
 registration code **305**, as shown in box **330**.

30 The process is similar to gun registration
 assuming the recording device is registered upon
 purchase. At the very least, the illegal media could
 be traced back to the recording device and its place of
 purchase, thus aiding law enforcement.

35 This recording device may be a physical device or

virtual device. A physical device could include a CD or DVD burner. A virtual device could include a software program using processor **900** and memory **910** to digitally compress (bit rate reduce) audio, such as a MP3 ripper or AAC encoder. Remember that media refers to the perceived data and not the storage medium.

Dynamic Locking

Fig. 3 displays the way in which dynamic locking blocks the duplication of the auxiliary data. Duplication is blocked for both bit-for-bit copying of the embedded data between content, and retrieving the embedded information, and re-embedding it into different content, such that the different content appears authentic.

Specifically, when only modifying the auxiliary information, a pirate will not be able to move the embedded data from one media segment to another without figuring out how to correctly unmodify and re-modify the embedded data. When only encrypting the auxiliary information, a pirate will not be able to obtain the auxiliary information. The pirate will be able to retrieve the embedded data, but not decipher it since it is encrypted. When both steps, the auxiliary information cannot be moved from one media segment to another. If it is moved directly, the modification step of dynamic locking causes the embedded data in the new media to be incorrectly unmodified because the values in the new media segment used for unmodifying the retrieved data don't match the values in the original media where the data was modified. If the pirate tries to unmodify and re-modify the embedded data (since the details of this step may be known), he/she must first have the key to decrypt the data in order to move it to new media segment.

Fig. 4 displays the input and output for the exclusive-or function (XOR). The XOR is its own inverse and extremely efficient.

Fig. 5A displays an overview of the dynamic locking and embedding process. The whole process contains three steps, but either one (not both) of the first two steps, i.e. those steps of dynamic locking, can be skipped. However, when both dynamic locking steps are performed the difficulty in duplicating the data is improved. In addition, the order of the last two steps can be switched. This switch is beneficial when the content, including the embedded data, is encrypted, usually for other content protection reasons, or when the modification step has some of the desirable features such as requiring a key to be unmodified.

In the first step, box **600**, the auxiliary data (d), which is to be embedded, is modified based upon the original content (c). This step is designed to modify the auxiliary data to be dependent upon the original content such that the embedded data cannot be copied bit-for-bit between content. The chosen content bits should be critical to the content, such that they cannot be changed in new content to make it appear authentic. A desirable function is the exclusive-or (XOR) operator since this function is its own inverse and efficiently implemented on digital processors.

In the second step, box **610**, the modified data is encrypted such that the original auxiliary bits cannot be obtained from the embedded data. Thus, the original auxiliary bits cannot be re-embedded in different content, making this different content appear authentic. If the auxiliary data is not modified by the original content before being encrypted, it could be copied bit-for-bit from the original content to new

content making the new content appear authentic. Any existing or future methods of encryption, including DES and RSA, can be used, with known methods of key management, all of which is well described in the prior-art.

In the third step, box **620**, the encrypted and modified (labeled dynamically locked) auxiliary data is embedded into the original content.

Fig. 5B displays an overview of the process used to retrieve and dynamically unlock the auxiliary data. The whole process contains three steps, and each step should only be performed if the corresponding step was performed when the data was embedded. In addition, if the order of the last two steps was switched while embedding, these two corresponding steps should be switched during this retrieval process.

In the first step, box **630**, the embedded data is retrieved from the content. At this time, the embedded data consists of encrypted and modified auxiliary data (assuming both dynamic locking steps were performed). In the second step, box **640**, the retrieved data is decrypted. In the third step, box **650**, the output of step two is unmodified. The result is the original auxiliary data.

In addition, dynamic locking and unlocking can use correlated data. Correlated data may include information such as song lyrics or the address of the person in a photographic identification card.

Figs 6 shows several example implementations of the modification part of dynamic locking and unlocking when data is embedded such that it will not be perceived (i.e. watermarking). Although, only the modification part is shown in Fig 6, the modified auxiliary information may be encrypted before being embedded and decrypted after being retrieved (but

before being unmodified), if desired. In addition, the modification of the auxiliary information may be skipped, and the auxiliary information may be only encrypted before being embedded and decrypted after being retrieved. The cryptology process is not discussed in detail since someone familiar with the state of the art easily understands its implementation.

Fig 6A shows dynamic locking and unlocking as applied to a utility patent application "Method and apparatus for embedding auxiliary information within original data" filed simultaneously with this application on 9/23/99 by the same author, Kenneth Levy, incorporated herein by reference. For dynamic locking, the peak value, box **200**, or threshold crossing value, is used in the exclusive-or (XOR) calculation to modify the next N auxiliary information bits, where N is the number of bits per sample in the data (such as 16 bits for CD audio). Then, these modified N bits of the auxiliary information are optionally encrypted and embedded by the method described in the reference patent-pending application using locally masked bit manipulations of difference Δ . This process is repeated for the next group of N peaks, and so on, until the whole modified auxiliary information is embedded or all the original data has been used with modified auxiliary information being repetitively embedded.

The embedded data can be retrieved using the process described in the referenced patent application, decrypted (if required), and unmodified. The unmodifying process is the inverse of the modifying process. Since the XOR function is its own inverse, the peak values of the combined data and the decrypted auxiliary information are applied to the XOR function. Importantly, the peak values are identical to those of

the original data since they were not changed during the embedding process.

For example, when using CD-audio, N is 16 bits. Thus, for this example, the first 16 bits of the auxiliary information are modified by the first peak value using the XOR. Then, these modified auxiliary information bits are optionally encrypted and embedded in the data points after the current peak and the next 15 peaks. This process is repeated for the following group of 16 peaks and auxiliary information bits, and so on, until all the data is embedded or all the original data has been used. The modified and optionally encrypted auxiliary information can be embedded over and over again within the data, by restarting the process with the first 16 bits of the auxiliary information after all of the bits have been embedded.

The embedded data can be retrieved, decrypted (if encrypted), and unmodified with the inverse of the XOR calculation, which is an XOR calculation. Thus, the first original 16 bits of the auxiliary information can be obtained by performing the XOR calculation with the retrieved and decrypted embedded data and first peak value. The retrieving process is continued for the next group of 16 peaks of the combined and embedded data, and so on, until the whole auxiliary information is found or all of the combined data has been traversed.

It is very important to keep proper track of the position of the groups of 16 bits in the auxiliary information when modifying for embedding, and unmodifying after retrieving.

The related patent application also allows sync pulses in the combined data. These sync pulses can be used to align the auxiliary information with the value

used in modifying the auxiliary information. For example, rather than embedding data after the peak used to modify the auxiliary information, a sync pulse could be embedded and used for re-alignment during the retrieval process.

Fig 6B shows dynamic locking and unlocking as applied to Patent #5,774,452 "Apparatus and method for encoding and decoding information in audio signals" by Jack Wolosewicz of Aris Technologies, incorporated herein by reference. For this case, the data values occurring previously in time to the embedding of the pulse-width modulated (PWM) bit stream and shown in box **220**, could be used in an XOR operation with auxiliary information to modify and unmodify the embedded data. In this case, several data values would need to be used to modify all of the auxiliary information. For example, when using 16 bit data and embedding 256 bits of auxiliary information, the dynamic locking and unlocking process would use the previous 16 original data points to modify all of the auxiliary information. As long as the data is received in the same order as it was embedded, it does not matter if the data values used to modify the auxiliary information overlap with the previous embedded bit stream. If one finds an configuration where the above does matter, it can easily be handled by skipping the second embedded bit stream and marking it as skipped in the combined data.

Fig 6C shows an overview of applying dynamic locking and unlocking to embedded data schemes based upon pseudo-random noise (PN) sequences. In one embodiment, the PN sequence could skip the M^{th} data point, as shown in boxes **250** and **270**, where M is equal to the number of bits per sample in the data (N) times the length in bits of PN sequence segment applied to each auxiliary information bit. This M^{th} data point

would be used in an XOR operation with b bits of the auxiliary information to modify the auxiliary information. For example, let's assume each auxiliary information bit is embedded with a 1024 bit segment of the PN sequence in 16 bit audio and the auxiliary information is 64 bits long. Then, after adding the PN sequence to 16384 ($M = 1024 \text{ bit PN segment} \times 16 \text{ bit audio}$) bits of original data, another original data point is skipped to modify the auxiliary information.

It will take 4 (64 bit auxiliary information/16 bit audio) of these segments to embed each auxiliary information. Equivalently, 4 adjacent original data points could be skipped every 65536 ($1024 \text{ bit PN segment} \times 16 \text{ bit audio} \times 4 \text{ PN segments}$) original data points and embed the whole modified auxiliary information in one continuous stream of four PN segments.

This modified and optionally encrypted auxiliary information will be used to control the fashion in which the PN sequence is added to the original data, as well known in the state of the art of spread spectrum technology. Specifically, in many applications, the PN sequence will be phase shifted by the modified auxiliary information (i.e. where 0 scales and adds the negative value of the PN sequence and 1 scales and adds the positive value) or simply multiplied by the auxiliary information. Once retrieved, the modified auxiliary information could be unmodified using the inverse XOR calculation with the skipped data point.

Another embodiment for PN sequences is using the skipped data point to modify the next N bits of the PN sequence, not the auxiliary information. If one point is skipped, the number of PN bits modified, M, should be equal to N, the number of bits in the data. If two points are skipped, M is equal to $2 \times N$, and so on.

Modifying the PN sequence using an XOR calculation and optional encryption is one scheme. However, this may reduce the randomness of the PN sequence, and other modification functions can be employed to maintain
5 randomness. Finally, the modified and optionally encrypted PN sequence is embedded in the media data and used to retrieve the embedded data.

In a final implementation of dynamic locking, it is applied to embedding methods that use PN sequences
10 to determine where to place the auxiliary information in the original data, possibly after being transformed into the frequency domain. Such methods include that of patents #5,613,004 and #5,687,236 "Steganographic method and device" by Marc Cooperman and Scott
15 Moskowitz of the Dice Company, incorporated herein by reference, and patent-pending technology of AT&T labs (Lacy J, Quackenbush SR, Reibman AR, Shur D, Snyder JH. (1998) "On combining watermarking with perceptual coding." ICASSP'98 Seattle, WA.), incorporated herein
20 by reference. For these methods, the PN sequence used to embed the data could be required to never have more than N continuous embed bits and start with a non-embed bit, where N is again the number of bits per sample in the original data. Then, the original data point
25 adjacent and previous to the first embed bit modifies the next N bits of the auxiliary information. This process may be repeated until all the original data is embedded, such that the modified auxiliary information is embedded repetitively. For example, when embedding
30 in the frequency domain from low to high frequency with 16 bit data and a 32 bit auxiliary information, the non-embed bit in the frequency bin just below first embed bit is used to modify the next 16 auxiliary information bits. Then, the non-embed bit in the
35 frequency bin just below the 17th embed bit is used to

modify the next 16 auxiliary information bits. Next, the non-embed bit in the frequency bin just below the 33rd embed bit is used to modify the first 16 auxiliary information bits, and so on.

5 In a similar scheme, the PN sequence could be applied to every other or k^{th} (where $k < N$ bits per sample in original data) data point, such that no limitations need be applied to the PN sequence. The process guarantees to have a non-embed bit next to the
10 N^{th} embed bit, and is implemented in similar fashion the previous method.

For all these methods of dynamic locking using PN sequences, the dynamic unlocking process is the inverse and obvious to a person familiar with the art given the
15 previous disclosure.

Fig. 7 demonstrates applying dynamic locking and unlocking to data embedded in header, not content, data. Fig. 7A displays the pseudo-code for the dynamic locking process. In general, the auxiliary data bits,
20 of length L , are locked and placed in the header of frames of the content and repetitively embedded.

Specifically, the process of Fig. 7A starts at the beginning of the content bits (box **700**) and auxiliary data bits (box **705**). Then, L auxiliary data bits are
25 locked by being modified with L bits of the content using the XOR or applicable function, and/or encrypted (box **735**). These L content bits should be critical to the either or both file format and content, such that they cannot be replicated in a different media segment
30 without disturbing it. Next, M bits of locked auxiliary data are embedded in the frame header (box **710**). These M bits should be less than L , and preferably L is divisible by M , such that the L bits are embedded in L/M frame headers. If L is not
35 divisible by M , a person familiar with the state of the

554049.09399

art can easily handle the offset. Then, the content is checked to see if more frames exist (box **715**). If there are no content frames left, the process is completed (box **730**). If there are more content frames, the auxiliary data is checked to see if any previously modified bits exist (box **720**). If there are previously modified auxiliary bits left, the next frame is read (box **725**), and the process is continued at box **710**. If there are no previously modified auxiliary bits left, the next content frame is read (box **740**), the auxiliary data is re-started at bit 0 (box **705**), and the process is continued at box **710**.

This process assumes the auxiliary information is of length L and L is reasonably short for ease of explanation. It is obvious that if you have a very large number of auxiliary bits, you can break them into segments of length L , and rather than starting at the first auxiliary bit each time, start at the k^{th} segment. To this end, the auxiliary bits are embedded within the data, broken into segments of length L and each segment is embedded in L/M frame headers.

To increase robustness to attack, a pseudo-random noise (PN) bit sequence could be used and the first N critical content bits with a corresponding PN bit value of 1 could be used for modifying the auxiliary information.

Alternatively, only the first important M content bits in each frame, rather than L bits every L/M frames, are used in the XOR calculation when embedding M locked auxiliary data bits in each frame. In this case, the auxiliary data bits are modified in each frame, specifically, between boxes **725** and **710** in Fig 7A. Once again, a PN sequence could be used to randomize which M bits of original audio are used. Importantly, M must be large enough so that error

correction in new content cannot repair all the content bits that need to be changed, such that a bit-for-bit transfer of the auxiliary data makes the new content appear authentic. The value of M depends upon the
 5 frame size and desired bit rate.

When using compressed content, such as MPEG data, specifically Layer III (MP3) or AAC audio as specified in the MPEG2 specifications, including the MPEG 1 and 2 specifications, ISO 11172-3 and ISO 13818-7
 10 respectively, herein by reference, the frames and header bits are pre-defined. The private, copyright, or ancillary bits can thus be used to embed the data. When using content without pre-defined frames, such as in raw PCM audio, databases, or software applications,
 15 the frames can simply be created. For example, the content could be arbitrarily divided into 1024 bit frames with header bits for the embedded data.

Alternatively, the locked auxiliary data could be placed only in the global header, defined as the header
 20 for the complete file, or in a linked but separate file. These two cases are less secure than embedding the data throughout the file. More bits mean the data will be more robust to attack via brute force. For broadcast content, the data should be embedded
 25 throughout the content as described above so the rendering device or person can receive the auxiliary information and respond accordingly from any point in the broadcast.

Fig. 7B displays the pseudo-code for the retrieval and dynamic unlocking process for the auxiliary data
 30 embedded in Fig 7A. In general, the auxiliary data bits are retrieved by reading them from the header of the content frames and unlocking them, in a repetitive manner.

35 Specifically, the process of Fig. 7B starts at the

5 Next, M bits of locked auxiliary data are read from the frame header (box **760**). Then, the content is checked for existing frames (box **765**). If there are no content frames left, the process is completed (box **780**). If there are content frames left, the auxiliary data bits are checked to see any exist (box **770**). If there are auxiliary bits left, the next frame is read (box **775**), and the process is continued at box **760**. If there are no auxiliary bits left, the retrieved auxiliary data is unlocked (box **790**), the next frame is read (box **795**),
15 the auxiliary data is re-started at bit 0 (box **755**), another N content bits are saved (box **785**) and the process is continued at box **760**.

Alternatively, if another modification function
30 was used, its inverse should be used. Importantly, the
same retrieved auxiliary bits and original content bits
should be used in the inverse calculation as were used
in the modifying calculation. For the embedding
example where the first M audio bits of the frame were
35 used to modify the auxiliary data, the first M audio

bits of the frame should be used to unmodify the modified auxiliary data, which was retrieved and decrypted. If a PN sequence was used to modify the auxiliary data, the same PN sequence should be used to
 5 unmodify the data.

If an alternative embedding step was used, the auxiliary bits are retrieved accordingly. For example, if bits are embedded in the global header or linked file, the are read from the global header or linked
 10 file, respectively.

Finally, the appropriate steps should be taken if the auxiliary data is longer than L or L is not divisible by M. These steps are obvious to a person familiar with the state of the art given the above
 15 explanations about dynamic locking and unlocking.

Example Utilization

These five example utilizations are described to aid in understanding the enabling and dynamic locking process and apparatus. The general underlying process for these examples is displayed in Fig. 8 and the corresponding apparatus is shown in Figs. 9 and 10. The process, in general, begins with a sending device
 20 **100**, dynamically locking an ID **140** as shown in box **110**, and embedding the locked ID within the media as shown in box **120**. Remember, as defined at the beginning of this section, the term ID usually refers to an identifier, but can include any auxiliary information. The sending device **100** may be an encoder, recorder,
 25 transmitter, storage medium, or the like.

The media is then transmitted to a receiving device **130** in which the locked ID is retrieved as shown in box **160**, and dynamically unlocked as shown in box **170**. Then, the proper action is enabled if allowed by
 35 the retrieved ID **140**, as shown in box **180**. The

09404291 092399

receiving device **130** may be a decoder, player, recorder, and/or the like.

When the dynamic locking and unlocking processes include encryption and decryption, the encryption key must be located somewhere and transmitted safely, as shown in boxes **151**, **152**, and **153**. Transmitting the key safely is well understood by one familiar with the state of the art in cryptology. The location of the key depends upon the requirements of the utilization. The five utilizations demonstrate various key locations. For most utilizations, the key will be available only in one of the three possible locations. In addition, the encryption and decryption key will usually be identical (symmetric), and referred to as the encryption key in the discussion below. However, public/private key encryption could also be used in many of these situations. When discussing private/public encryption below the key will be specified as the public or private encryption key. Finally, certain utilizations may not need to transmit the auxiliary information since the values are predefined.

In addition, the use and location of **ID 140**, the types of sending devices **100** and receiving devices **130** are also explained in more detail in these example utilizations.

The five example utilizations include distribution of MP3 data, copy-once access to broadcast data, DVD copy protection, photo-card verification, and secret data transmission. From these explanation, many more utilizations are obvious.

Regarding distribution of MP3 data, the concept is explained using several scenarios. All scenarios include both a software PC-based and portable MP3 audio player, and distribution via the Internet.

In the first scenario, the MP3 data exists on the Internet and is purchased by an end-user. The delivery system interacts with the end-user's player, securely transmitting ID **140** and the encryption key, shown in box **151**, from the receiving device to the sending device, and dynamically locking, including encryption, the ID **140** in the MP3 data. In this scenario, the encryption key, shown in box **151**, is located on the end-user's player. After the MP3 file is delivered (i.e. downloaded) only the end-user's player can play the data since other players will have different IDs. A portable and PC-based player may share the ID **140**, and this is easily implemented by a software program and current digital electronics, such as EPROM or flash memory. Since the ID **140** is dynamically locked the end-user cannot extract the ID **140** and use it in another song or MP3 file.

In another scenario, the MP3 encoder and player may be part of one software program, which transforms CD, DVD or broadcast audio into MP3 audio with the embedded data containing the dynamically locked, including encryption, ID **140**. In such an example, there is no need for the exchange of an encryption key, as displayed in box **151**, and ID **140**. The software applications should be programmed such that the key and ID **140** are protected from the end-user, as well known in the state of the art in software. Again, the key, shown in box **151**, is located within the end-user's player. The transformed MP3 audio is now only playable on the end-user's system and/or portable player, and it is not possible to move the ID **140** to another song as described above.

In yet another scenario, the key could be located in a central database, as shown in box **152**. This configuration allows a different key for each player

and MP3 audio sample. This configuration increases robustness to attack since new keys are used for each song, but involves extra management tools and responsibilities.

- 5 In a final scenario for MP3 audio, the ID **140** could contain time limits for listening to the audio or a date limit that, when exceeded, the audio will not play. The player will keep track of how many times the song has been played or whether the date has expired.
- 10 The ID **140** could contain a demo code, which does not limit the song to one player.

- Regarding copy-once access (defined as allowing an end-user to copy the media only once, perhaps for time shifting purposes), the concept is explained in terms
- 15 of the broadcast of a movie. With broadcast media, it is best if everyone shares the same encryption key. The key, as shown in box **153**, could be broadcast embedded in the movie, and changed for each broadcast. In addition, if the embedded data is not encrypted,
- 20 there is no need for a key, thus simplifying transmission. Finally, the copy-once ID **140** will be predefined, meaning that it is already defined in the transmitting and receiving device, as shown in Fig. 8 where ID **140** has an optional location in the
- 25 transmitting device. Once the broadcast is received and the retrieved ID **140** enables the data to be recorded, the recorder can record the movie and either remove the copy-once ID **140** or change the ID **140** to a predefined code that informs other recorders that the
- 30 media has been copied once.

- Regarding DVD copy protection, there are two scenarios. In the first scenario, the player will not play the media unless the embedded ID enables the action. The encryption key, as shown in box **153**, is be
- 35 included on the DVD in a non-copy access location.

This means the user will be able to play the media only when the DVD disk is present since the player will not play the DVD data without retrieving the correct ID. A copy of the entire DVD (minus the encryption key since
 5 it is unable to be copied) or a copy of a content file will be unusable since the key to decrypt the embedded data will not be found and without it the player will not work.

In addition, the key could be located in a
 10 centrally accessible database, and possibly linked to the requesting end-user player, as shown in box **152**. This configuration increases robustness to attack since access to the key is monitored, but includes extra management responsibilities for the content provider
 15 and additional time for the end-user. The key could also be purchased and encrypted by the key in your player as described in patent-pending technology by Paul Schneck (incorporated herein by reference). Once again, the ID **140** will be predefined, and exist in the
 20 sending device **100**.

In a different scenario, the predefined ID **140** could be used to enable the recorder, and allow a certain number of copy generations, or a copy of only the original, known as serial copy management. ID **140**
 25 could be modified to allow one less recording generation each time the DVD is recorded. Possibly through keeping track of the recorded generation and originally allowed count or by reducing the allowed count. For serial copy management, the watermark could
 30 be removed in the second generation DVD. Remember that in this approach if the watermark does not exist, no copies can be made. Finally, there could be two-layered ID **140s** for both types of copy management.

The photo-card utilization example involves having
 35 the picture in the photo-card embedded with the ID **140**.

If the correct information is not present, the card is a fake and will not be authorized for use. To increase the security of the method dynamic locking is applied; the ID **140** is reversibly modified by the photograph or connected data such as the corresponding name and address, and encrypted, such that the information cannot be copied between cards or from a legitimate card to an illegal card. The matching ID **140** and encryption key can be stored at a database only accessible by every sending device (i.e. in the sending device) and securely transmitted between the database and the photo-card reading device, such as using RSA key exchange or any other method known in the state of the art of cryptology. Besides being as secure as other cryptology techniques, another advantage of this process is that it requires transmission of minimal data, including the short ID **140** and encryption key.

The last example utilization allows the secure transmission of secret information in ID **140**, hidden in the media. Most bystanders will not know the secret message is attached. Once the receiving device extracts the hidden message, the receiving device, a connected device, or a human will be enabled by the hidden information contained in ID **140**. If found, the hidden information can be protected from being moved to other media segments and/or interpreted by using dynamic locking with various encryption schemes. For example, if the secret information is encrypted with your public key, only you can recover it. Or if it is encrypted with your private key, people or devices receiving the message using your public key know it was signed by you and is authentic. If it is encrypted with a symmetric key, only the holders of the key could have created and read the message. Finally, if the modification step of dynamic locking is used, the

receiver knows the message was not transferred from a different media segment.

Apparatus

5 Fig. 9 shows the hardware apparatus required to implement the enabling, registration, and dynamic locking processes. The hardware includes a logic processor **900** and memory **910**. The logic processor **900** may be defined as the equivalent of a digital signal
10 processor (DSP), general-purpose central processing unit (CPU), or a specialized ASIC chip. A likely DSP chip is one of the Texas Instruments TMS320 product line. A CPU could include one of Intel's Pentium line or Motorola/IBM's PowerPC product line. The design is
15 straightforward for someone familiar with the state of the art given the description of these processes. The memory **910** includes any type of memory.

 Fig 10A shows more detail of the apparatus for dynamic locking. Specifically, the logic processor **900**
20 and memory **910** must work together to act as the modifier **1010** and encrypter **1040**. Modifier **1010** performs the modification step of dynamic locking. Encrypter **1040** performs the encryption step of dynamic locking.

25 Fig 10B shows more detail of the apparatus for dynamic unlocking. Specifically, the logic processor **900** and memory **910** must work together to act as the decrypter **1045** and the unmodifier **1015**. The decrypter **1045** performs the decryption step of dynamic unlocking.
30 The unmodifier **1015** performs the unmodifying step of dynamic unlocking. The unmodifier **1015** and decrypter **1045** of dynamic unlocking may use the same or different circuitry as the modifier **1010** and encrypter **1040** of dynamic locking. However, when using the same
35 circuitry, the dynamic locking and unlocking processes

Conclusions, Ramifications and Scope

The foregoing descriptions of the preferred embodiments of the invention have been presented to teach those skilled in the art how to best utilize the invention. Many modifications and variations are possible in light of the above teaching. For example, the method in which the auxiliary information is dynamically locked can easily be adapted and fall within the scope of this disclosure. In addition, applying the enabling concept to alternative data configurations is an obvious extension of the description above. To this end, the following claims define the scope and spirit of the invention.

Claims

1. A method of enabling an action by the presence of embedded data.
2. The method of claim 1 in which the enabling process includes
 - (a) retrieving the embedded data into memory;
 - (b) using a logic processor to determine if the embedded data allows the desired action; and
 - (c) allowing the desired action if the embedded data allows the desired action.
3. The method of claim 1 in which the process includes encryption of the auxiliary information.
4. The method of claim 1 in which the auxiliary information is dynamically modified based upon the original data.
5. The method of claim 4 in which the process includes encryption of the auxiliary information.
6. The method of claim 1 in which the encryption key is stored in a database accessible by both the sending and receiving devices.
7. The method of claim 1 in which the encryption key is stored within the receiving device and is the same for every media segment.
8. ~~The~~ ^{A " 9/13/17} method of tracing an illegal version of media to the creation device using data embedded by the creation device.
9. The method of claim 8 in which only mass-duplication creation devices embed the embedded data whereby not inconveniencing the average user.
10. The method of claim 8 in which the device is a virtual or software creation device.
11. ~~The~~ ^{A " 1/13/19} method of dynamically locking embedded data in which the auxiliary information is modified based upon the original or correlated data.
12. The method of claim 11 in which the auxiliary

information is also encrypted

13. The method of claim 12 in which modifying the auxiliary information is based upon the value of the peak or threshold crossing as used in patent application #_____ filed on 9/23/99 entitled "Method and apparatus for embedding auxiliary information within original data" by the same author as this application, Kenneth L. Levy.
14. The method of claim 12 in which modifying the auxiliary information is based upon the values previous in time to the embedded bit stream in Patent #5,774,452 by Jack Wolosewicz of Aris Technologies.
15. The method of claim 12 in which modifying the auxiliary information is based upon unchanged original data bits purposely skipped when embedding a PN sequence.
16. The method of claim 12 in which modifying the auxiliary information is based upon original data bits which are not used for embedding because the PN sequence is forced to designate these as non-embedding data in locations.
17. The method of claim 12 further including an embedding process, which involves repetitively placing the locked auxiliary data bits in slots located in the header of each frame.
18. The method of claim 12 further including an embedding process, which involves placing the locked auxiliary data bits in the global header of the file.
19. ~~The~~ ^{file 1/15/99} method of dynamically unlocking retrieved data in which the auxiliary information is unmodified based upon the original or correlated data.
20. The method of claim 19 in which the auxiliary information is also encrypted

21. The method of claim 20 in which unmodifying the auxiliary information is based upon the value of the peak or threshold crossing as used in patent application #_____ filed on 9/23/99 entitled
 5 "Method and apparatus for embedding auxiliary information within original data" by the same author as this application, Kenneth L. Levy.
22. The method of claim 20 in which unmodifying the auxiliary information is based upon the values
 10 previous in time to the embedded bit stream in Patent #5,774,452 by Jack Wolosewicz of Aris Technologies.
23. The method of claim 20 in which unmodifying the auxiliary information is based upon unchanged
 15 original data bits purposely skipped when embedding a PN sequence.
24. The method of claim 20 in which unmodifying the auxiliary information is based upon original data bits which are not used for embedding because the PN
 20 sequence is forced to designate these as non-embedding data in locations.
25. The method of claim 20 further including a retrieving process, which involves repetitively placing the locked auxiliary data bits in slots
 25 located in the header of each frame.
26. The method of claim 20 further including a retrieving process, which involves placing the locked auxiliary data bits in the global header of the file.
- 30 27. ^{As per 9/23/99} The apparatus including a logic processor and memory to implement the invention's enabling, registration or dynamic locking processes.
28. The apparatus of claim 27 used to dynamically lock auxiliary information wherein the logic processor
 35 and storage unit include

0940491-0929
 662269 T 6240460

(a) a modifying device which modifies the auxiliary data by the original data; and

(b) an encrypting device which encrypts the data.

29. The apparatus of claim 27 used to dynamically .

5 unlock auxiliary information wherein the logic processor and storage unit include

(a) a unmodifying device which unmodifies the auxiliary data by the original data; and

(b) a decrypting device which decrypts the data.

09404291 090399

Abstract of the Disclosure

This invention describes a method and apparatus for the increasing the robustness of embedded data.

- 5 Since many times embedded data is susceptible to removal by an unauthorized person, one preferred embodiment enables an action such that removal of the embedded data provides the attacker no gain. In another preferred embodiment, recording devices are required to
- 10 embed a registration code in copies, thus aiding in tracing illegal copies. Finally, dynamic locking, including modifying and encrypting the auxiliary data and applicable to all data embedding techniques, is shown to provide this robustness to duplication and
- 15 modification. The apparatus implements the above two processes with a logic processor and storage unit.

09404291.096399

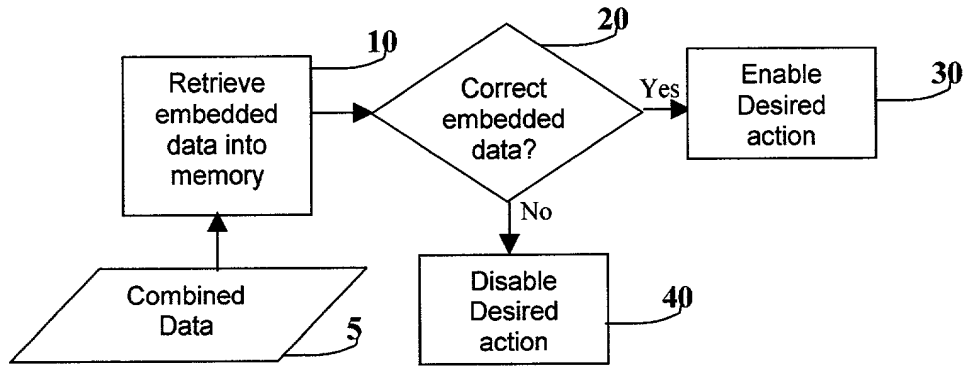


Fig. 1

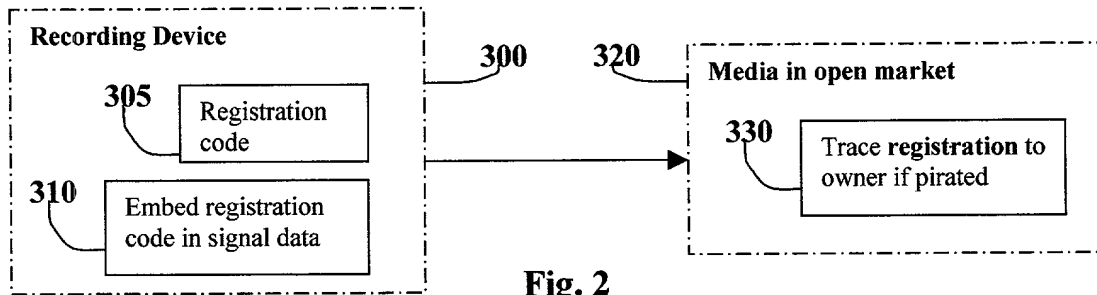


Fig. 2

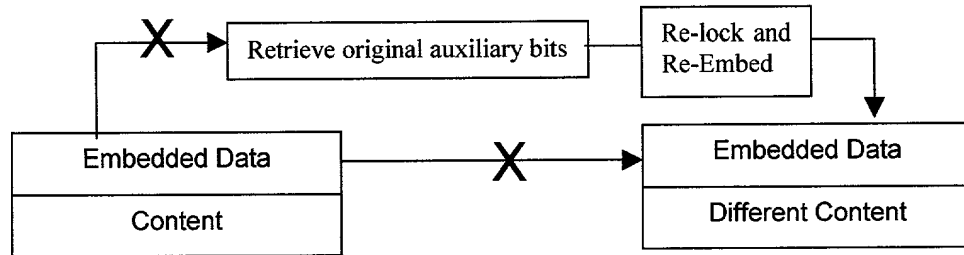


Fig. 3

XOR

d	c	f(d,c)
1	1	0
1	0	1
0	1	1
0	0	0

Fig. 4

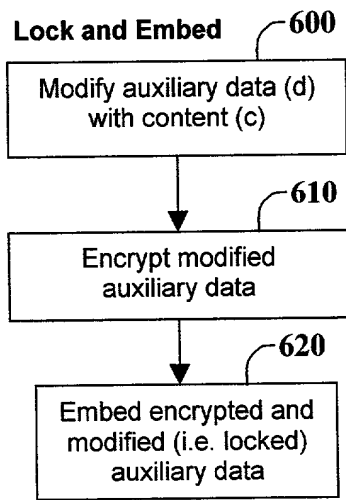


Fig. 5A

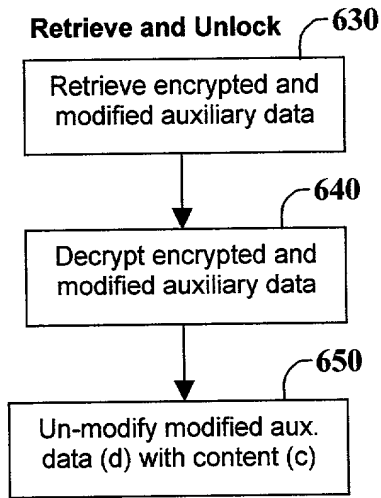


Fig. 5B

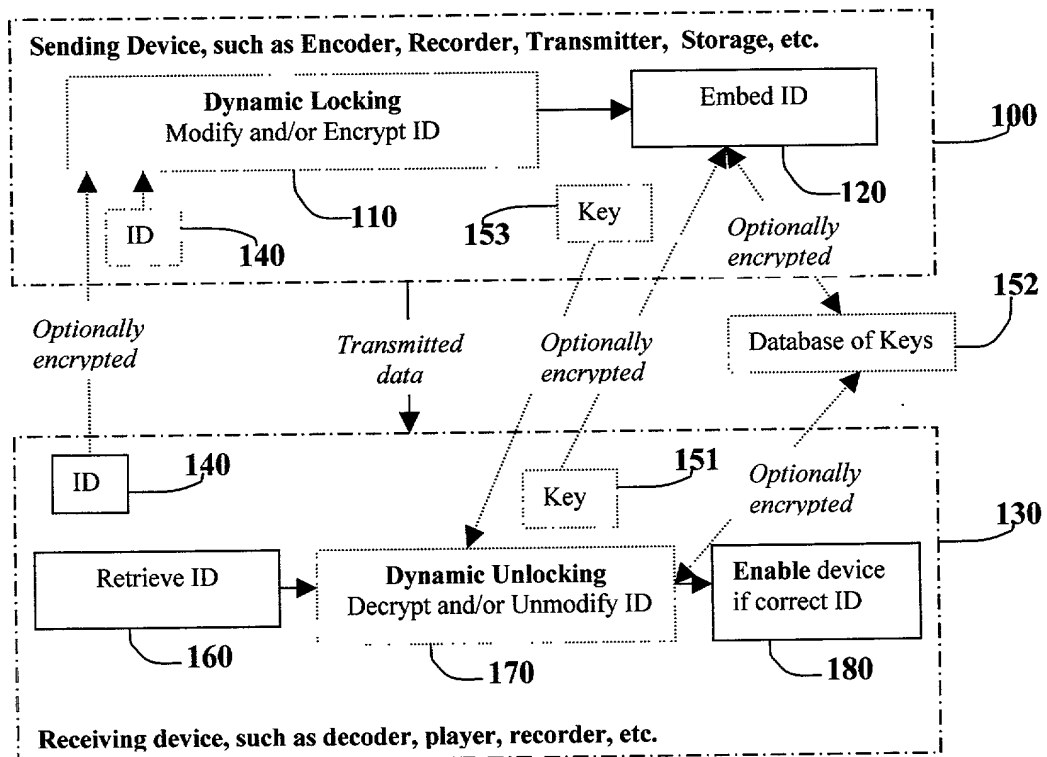


Fig. 8

Modifying and unmodifying aux. data for patent application #60-101851

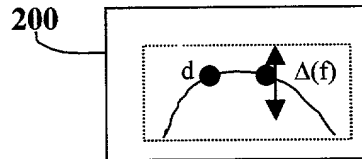


Fig. 6A

Modifying and unmodifying aux. data for patent #5,774,452

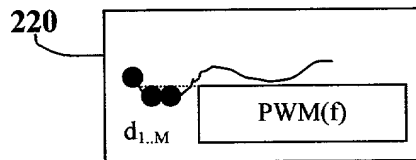


Fig. 6B

Modifying and unmodifying aux. data for methods based upon PN sequences

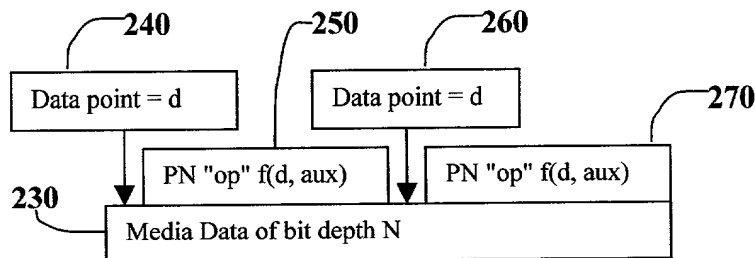


Fig. 6C

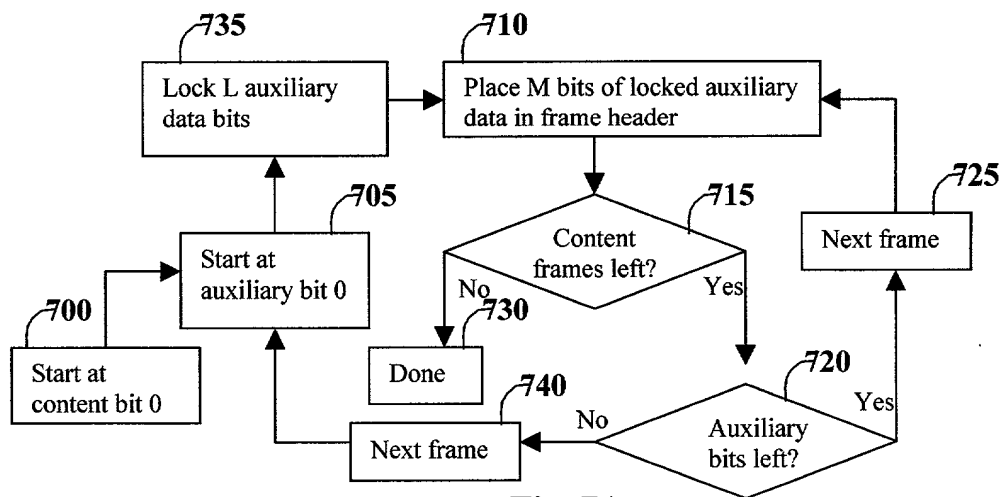


Fig. 7A

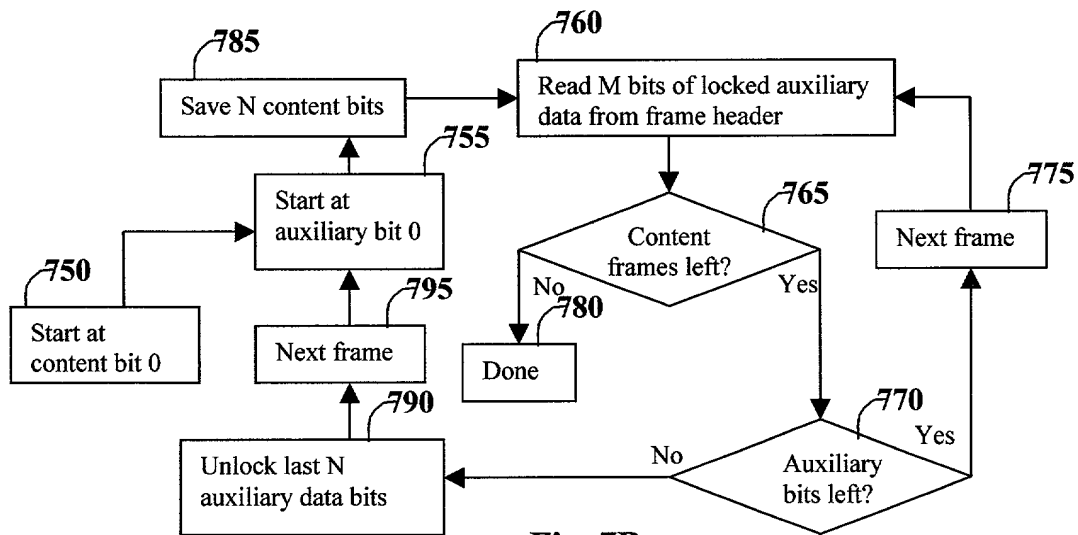


Fig. 7B

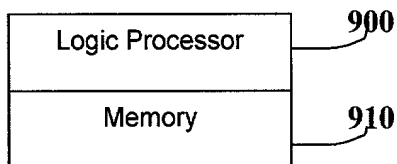


Fig. 9

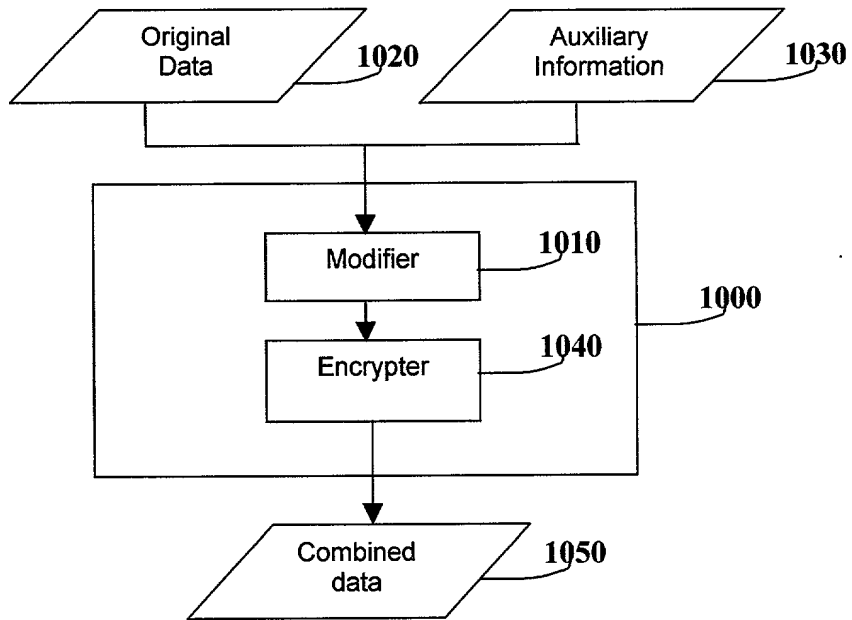


Fig. 10A

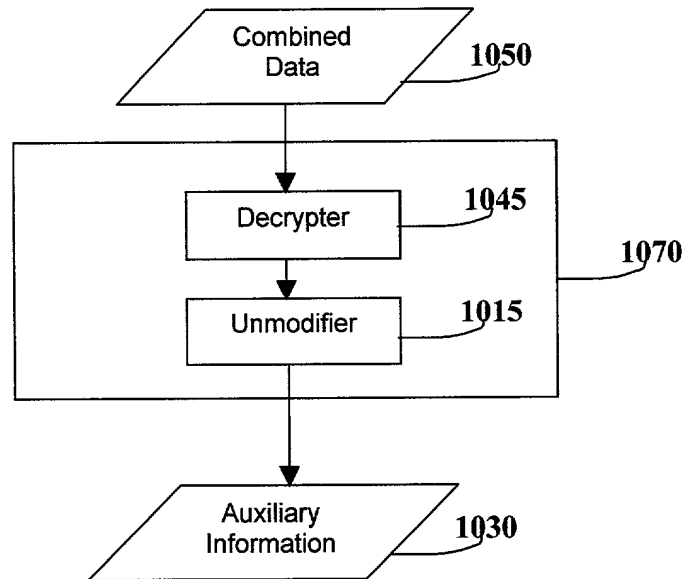



Fig. 10B

Please type a plus sign (+) inside this box → 

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	Levy 2 R
	First Named Inventor	Kenneth L. Levy
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	September 23, 1999
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method And Apparatus For Robust Embedded Data.

the specification of which (Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
#60/101,851	09/25/1998
#60/110,683	12/02/1998
#60/114,725	12/31/1998
#60/126,591	03/26/1999

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box →



PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label

OR ☒ Correspondence address below

Name	Ken Levy, AIPL				
Address	110 NE Cedar Street				
Address					
City	Stevenson	State	WA	ZIP	98648
Country	USA	Telephone	509-427-5374	Fax	509-427-7101

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
Kenneth Lee		Levy					
Inventor's Signature	[Signature]		Date	9/23/77			
Residence: City	Stevenson	State	WA	Country	USA	Citizenship	USA
Post Office Address	110 NE Cedar Street						
Post Office Address							
City	Stevenson	State	WA	ZIP	98648	Country	USA

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto